




Colour:
green with a red stripe

Features:
PVC hose reinforced with an anti-shock rigid PVC spiral

Inside surface smooth, light corrugation outside.
Strong and flexible, resistant to crushing, abrasion, atmospheric agents and most chemicals

Applications:
Excellent for suction in general, particularly suitable to be used on tank trucks thanks to its physical-mechanical features.
Antistatic version with copper wire available on request

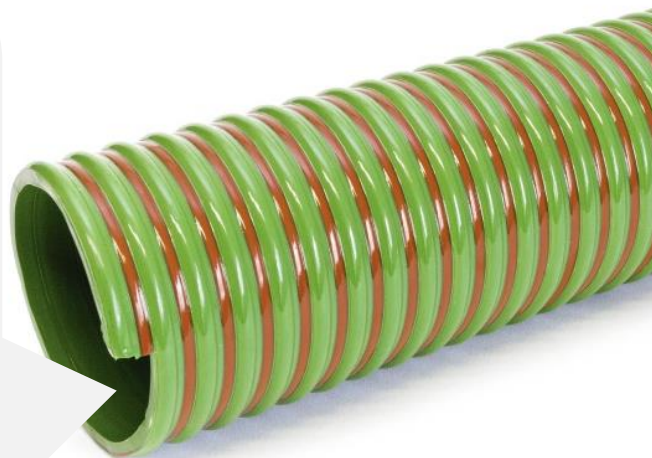

Technical data

Part number	Ø Ins.	Min wall thick.	Max wall thick.	Weight	W.P.	B.P.	Vac.	Bending R.	Coil Lgth.	Vol.
	[mm]	[mm]	[mm]	[g/m]	[bar]	[bar]	[m H2o]	[mm]	[m]	[m ³]
AX 20 052.0 000.0	50,8*	3,6	4,5	850	3	9	9	200	50	0,311
AX 20 060.0 000.0	60*	4,1	5,1	1150	3	9	8,5	250	50	0,404
AX 20 076.0 000.0	76,2*	4,2	6,1	1500	3	9	8	310	50	0,646
AX 20 080.0 000.0	80*	4,2	5,6	1650	3	9	8	320	50	0,722
AX 20 090.0 000.0	90*	4,6	6,6	2060	3	9	8	360	30	0,594
AX 20 100.0 000.0	100*	4,6	6,6	2200	2	6	7,5	410	30	0,764
AX 20 102.0 000.0	102*	4,6	6,6	2200	2	6	7,5	410	30	0,777
AX 20 110.0 000.0	110*	5,0	7,2	2650	2	6	7,5	450	30	0,955
AX 20 120.0 000.0	120*	5,2	7,0	2890	2	6	7,5	480	30	1,029
AX 20 127.0 000.0	127*	5,2	7,5	3200	2	6	7	510	30	1,231
AX 20 133.0 000.0	133*	5,3	7,6	3400	2	6	7	510	30	1,285
AX 20 152.0 000.0	152,4*	6,0	8,6	4390	2	6	7	610	20	1,329
AX 20 160.0 000.0	160*	6,4	8,9	4770	1,5	4,5	6	630	20	1,422
AX 20 203.0 000.0	203,2*	8,4	12,0	8660	1,5	4,5	6	850	10	2,199

*Available on request, contact our sales office for more info and quantities
 The technical data here reported were measured at 23°C with 50% humidity
 We reserve the right to alter products specifications without prior notice