


Code	
Item no	592
Description	Battery Cassette/NiMH 2000 mAh

A high-capacity battery cassette for all the Scanreco Portable Control Units (PCU).

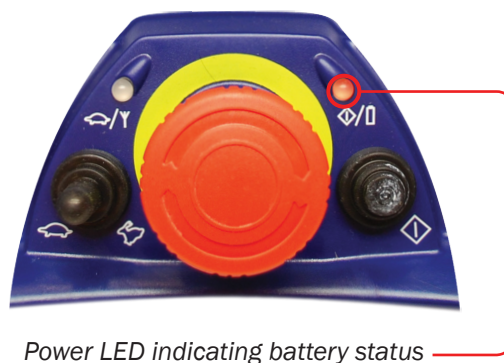

The battery cassette has engraved text on both front and back side to validate authenticity.

Quick facts:

The effective operational capacity of the battery is approximately 15 hours per charge (varying depending on PCU type and configuration).

Charging time is approx. 3 h for a depleted battery.

When the battery is approaching time for recharging, the Portable Control Unit beeps three (3) times as a warning and at the same time the LED Power starts to blink, the battery should preferably be used until fully depleted (the Portable Control Unit LED deactivates), after which it can be charged.

The battery capacity and operational performance is reduced in extremely cold environments.

The battery is automatically charged during operation via cable control.

In order to preserve battery and for safety reasons, the Portable Control Unit is in default configuration programmed to deactivate automatically if the unit has been idle for more than five (5) minutes.

Technical information on next page ->

TECHNICAL INFORMATION

Type	NiMH battery	
Nominal voltage	7.2 VDC	
Nominal capacity	2000 mAh	
Service Life	300 cycles (according to IEC discharge characteristics standard)	
Weight	0,20 kg	0,44 lb
Dimensions (WxHxD)	150 x 50 x 28 mm	5,90 x 1,97 x 1,10 in
IP Class	IP67	
Ambient temperature (Celsius)	-0°C to +45°C	-32°F to +113°F