




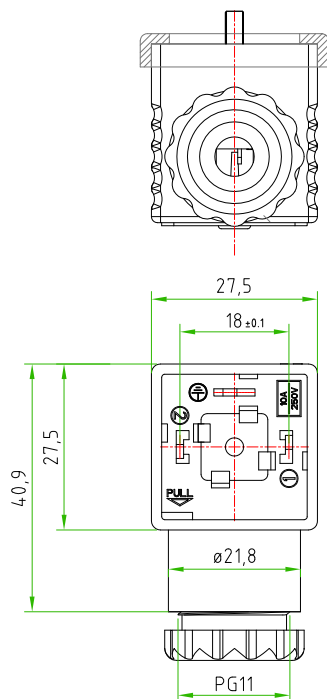


Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Firma	Approved

Rev.	Modify	Date	Signed	Approved



CUSTOMER APPROVAL

SIGNATURE DATE

PLEASE SIGN
AND RETURN

PRODUCT TYPE	EN175301-803 FORM A FIELD ATTACHABLE.
HOUSING MATERIAL / COLOUR	PA66 / TRANSPARENT
PRESS-CABLE MATERIAL / COLOUR	PA66 / BLACK
INTRENAL CORE MATERIAL / COLOUR	PA66 / BLACK
HEIGHT HOUSING	30mm
CONTACTS SPACING	18mm
CONTACTS TYPE	SCREW CONTACTS(with protection plate)
NUMBER OF POLES	2POLES+EARTH
EARTH POSITIONING	H.12 (TURNABLE)
CABLE EXIT	PG9/11 UNIFIED
SUITABLE CABLE	FROM ø6mm TO ø10mm
MAX.CONDUCTOR SIZE	1,5mm ²
PROTECTION CLASS	IP67
CIRCUIT TYPE	BIPOLAR RED LED
RATED VOLTAGE	24V AC/DC
CONNECTOR TEMPERATURE RANGE	from -40°C to +90°C
GASKET TYPE	PROFILED NBR
FIXING SCREW	M3X0,5 L=32,5mm
CONNECTOR WITH H.T.P. LOGO	

Designer	SUGLIANI R.	Date	2016-05-30	Tolerance	±0,2	Units	mm	Series	EN175301-803 (form A)	Drawing n. 1/1
Approved	CIMMINO L.	Date	2016-05-30	Scale	1:1	Size	A4	Customer code:		



DESCRIPTION

SQUARE CONNECTOR EN175301-803 FORM A, FIELD ATTACHABLE, 2P.+PE, WITH BIPOLAR RED LED, 24V AC/DC, TRANSPARENT HOUSING, PG9/11 unified. CONNECTOR WITH H.T.P. LOGO.

H.T.P.PART NUMBER

G1TU2L01