
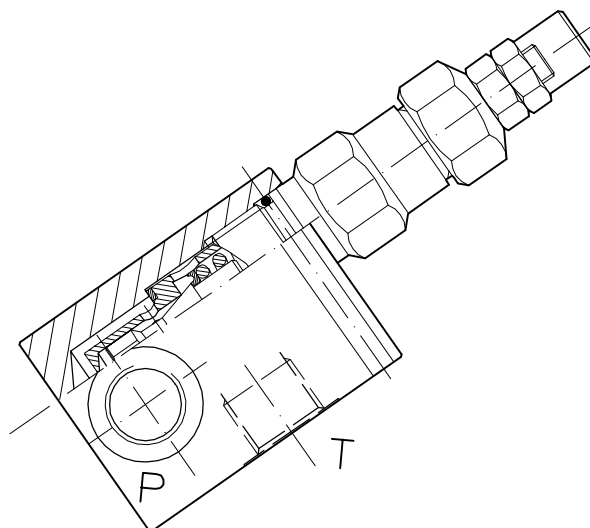


VMP-80-...-C-...-L

VALVOLA DI MASSIMA PRESSIONE A CARTUCCIA AD AZIONE DIRETTA CON OTTURATORE CONICO E COLLETTORE IN LINEA

CARTRIDGE RELIEF DIRECT ACTING POPPET TYPE VALVE WITH IN LINE BODY



CARATTERISTICHE


Luce nominale
Portata min/max
Pressione di lavoro max.
Pressione max. di taratura
Temperatura ambiente
Temperatura olio
Filtraggio consigliato
Peso 1/2" GAS
Peso 3/4" GAS

DN 11


80 l/min - 21 GPM
350 bar - 5075 PSI
350 bar - 5075 PSI
-30°C + 50°C
-30°C + 80°C
30÷50 micron
0.911 Kg
0.873 Kg

PERFORMANCE

Rated size
Min/max flow-rate
Max working pressure
Max setting pressure
Room temperature
Oil temperature
Recommended filtration
Weight 1/2" GAS
Weight 3/4" GAS

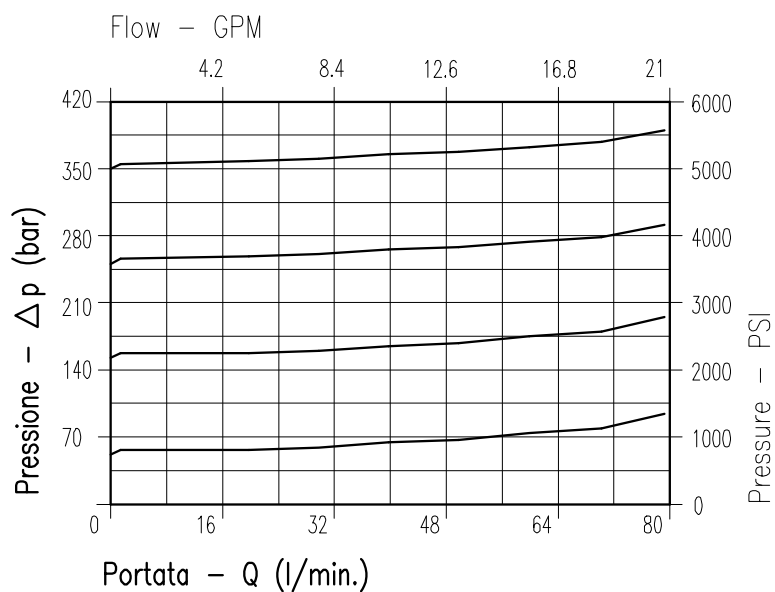

Viscosità olio 46 cSt a 50°C
Oil viscosity 46 cSt at 50°C

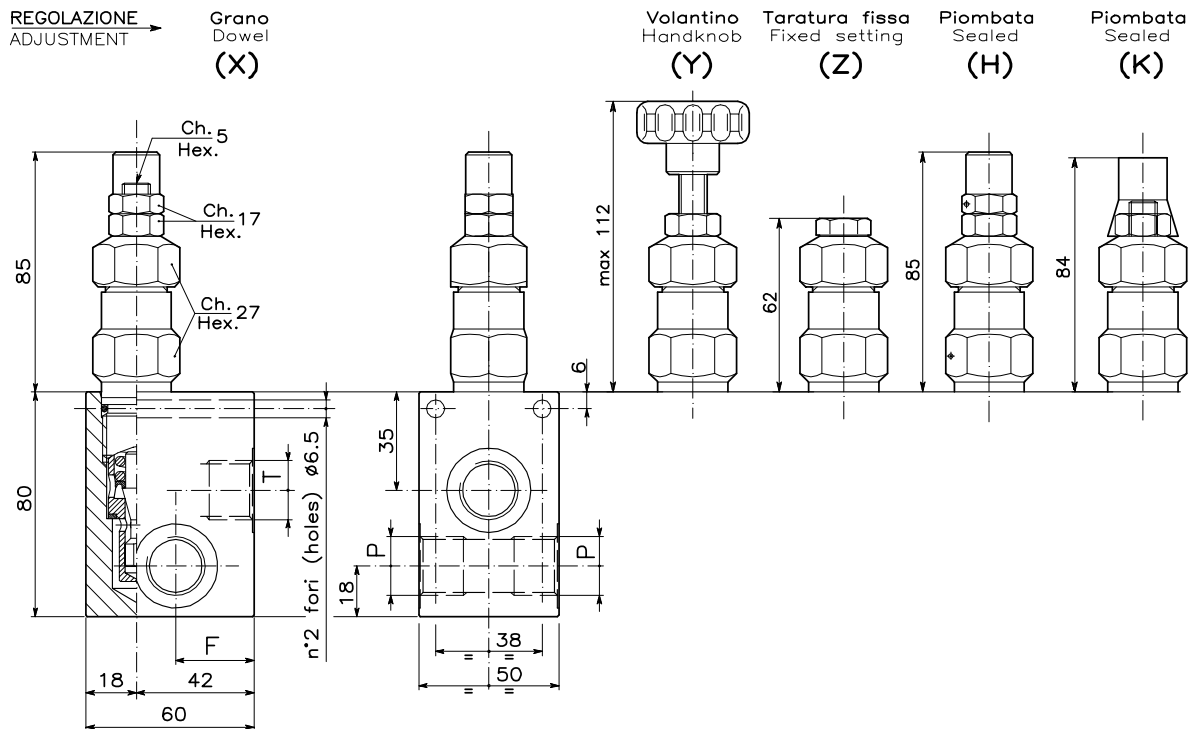

DIMENSIONI DIMENSIONS

Campo taratura Setting range					F	Attacchi Port size P-T GAS (BSPP)
023	199	200	201	202	28	1/2"
024	208	209	210	211	28	3/4"

CODICE DI ORDINAZIONE HOW TO ORDER

002 023 0 X 0

Regolazione Adjustment	
X	Grano - Dowel
Y	Volantino - Handknob
Z	Taratura fissa - Fixed setting
H	Piombata - Sealed
K	Piombata - Sealed

Campo taratura / Setting range									
023	199	200	201	202					
024	208	209	210	211					
Campo taratura 5÷50 bar (molla colore blu) Setting range 5÷50 bar (blue spring)	Campo taratura 5÷100 bar (molla colore nero) Setting range 5÷100 bar (black spring)	Campo taratura 10÷150 bar (molla colore verde) Setting range 10÷150 bar (green spring)	Campo taratura 25÷250 bar (molla colore giallo) Setting range 25÷250 bar (yellow spring)	Campo taratura 40÷350 bar (molla colore rosso) Setting range 40÷350 bar (red spring)					
Taratura standard (Q=5 l/1') Std. bar setting (Q=5 l/1')	Incr. press. - bar giro/vite Pressure rise - turn of screw	Taratura standard (Q=5 l/1') Std. bar setting (Q=5 l/1')	Incr. press. - bar giro/vite Pressure rise - turn of screw	Taratura standard (Q=5 l/1') Std. bar setting (Q=5 l/1')	Incr. press. - bar giro/vite Pressure rise - turn of screw	Taratura standard (Q=5 l/1') Std. bar setting (Q=5 l/1')	Incr. press. - bar giro/vite Pressure rise - turn of screw	Taratura standard (Q=5 l/1') Std. bar setting (Q=5 l/1')	Incr. press. - bar giro/vite Pressure rise - turn of screw
40 bar	(--)	80 bar	(--)	120 bar	(--)	210 bar	(--)	320 bar	(--)