



Pressure gauges · Pneumatics **MI Series**



CONSTRUCTIONAL FEATURES

Pressure gauges for all non-corrosive fluids at temperatures between -20 and +80 °C, compatible with copper and its alloys (always indicate the utilized fluid).

Precision amplifier movement in brass.
Dial in stove-enamelled aluminium.

Pressure gauge parts:


- Bourdon tube in copper alloy for pressure ratings from -1 to 40 bar.
- spiral tube in copper alloy for pressure ratings from 60 to 1000 bar.

Welds in tin alloy.

Protection degree Ip 32.

Particularly suitable for compressors, pressure reducers, pumps and any other use in the plant and industrial air-operating sector.

nom.	DIMENSIONI - Dimensions				
	a	b	c	d	i
40	26,5	27,5	43	40	10

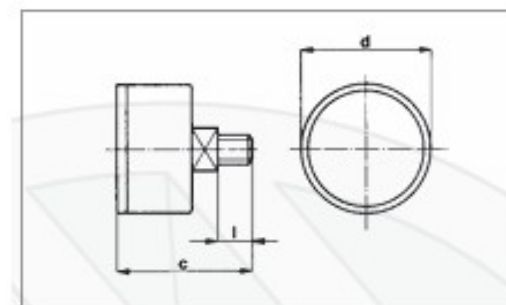

· Standard threads

BSP DIN 16288	
1/8	1/4
	