



Pressure gauges · Hydraulics LX Series

CONSTRUCTIONAL FEATURES

Pressure gauges for all non-corrosive fluids at temperatures between -20 and +80 °C, compatible with copper and its alloys (always indicate the utilized fluid).

– stainless steel AISI 304 case.

Precision amplifier movement in brass.

Dial in stove-enamelled aluminium.

Pressure gauge parts:

– Bourdon tube in copper alloy for pressure ratings from -1 to 40 bar.


– spiral tube in copper alloy for pressure ratings from 60 to 1000 bar.

Welds in tin alloy.

Protection degree Ip 65.

Particularly sturdy, used for plumbing systems, pumps, compressors, machine tools, high pressure water cleaners, refrigerating systems.

TIPO D
TYPE D

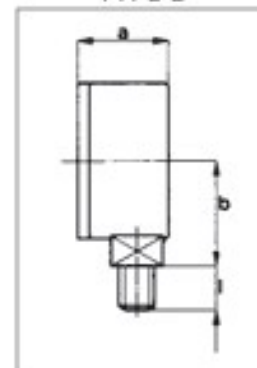

Standard Threads

BSP DIN 16288			
1/8	1/4	3/8	1/2
			

DIMENSIONI E SISTEMA DI MONTAGGIO

DIMENSIONS AND ASSEMBLY SYSTEM

nom.	DIMENSIONI · Dimensions												
	a	b	c	d	e	f	g	h	i	l	m	n	o
63	34	44	46	68.5	9	62	87	75	3.6		6.5	79	