




Type VSRU/C needle valves

- Poppet type
- With check valve

Technical specifications and diagrams are measured with mineral oil of 46 cSt viscosity at 40°C (104°F) temperature.

		VSRU/C 14	VSRU/C 38	VSRU/C 12	VSRU/C 34	VSRU/C 100	VSRU/C 114	VSRU/C 112
Nominal flow from A to B		30 l/min (7.9 US gpm)	40 l/min (10.6 US gpm)	50 l/min (13.2 US gpm)	80 l/min (21.1 US gpm)	110 l/min (29 US gpm)	150 l/min (39.6 US gpm)	210 l/min (55.5 US gpm)
Nominal flow C from B to A		30 l/min (7.9 US gpm)	50 l/min (13.2 US gpm)	80 l/min (21.1 US gpm)	110 l/min (29 US gpm)	160 l/min (42.27 US gpm)	210 l/min (55.5 US gpm)	280 l/min (74 US gpm)
Nominal flow S from B to A		12 l/min (3.17 US gpm)	25 l/min (6.6 US gpm)	35 l/min (9.25 US gpm)	50 l/min (13.2 US gpm)	-	-	-
Max. pressure		350 bar (5100 psi)	350 bar (5100 psi)	350 bar (5100 psi)	300 bar (4350 psi)	250 bar (3600 psi)	230 bar (3300 psi)	230 bar (3300 psi)
Fluid					mineral based oil			
Viscosity					from 10 to 200 cSt			
Max. level of contamination					18/16/13 ISO4406			
Fluid temperature					with NBR seals: from -20°C (-4°F) to 80°C (176°F)			
Environmental temp. for working conditions					from -40°C (-40°F) to 100°C (212°F)			
Weight	steel	0.30 kg (0.66 lb)	0.48 kg (1.06 lb)	0.59 kg (1.3 lb)	1.34 kg (2.95 lb)	2.15 kg (4.74 lb)	3.31 kg (7.3 lb)	4.76 kg (10.49 lb)


NOTE - For different conditions, please contact Walvoil Sales Dpt.



Dimensions


Dimensions are in mm-in

Valve type	All ports	A	⌀B	⌀c
VSRU/C 14	G 1/4	66-2.6	32	22
VSRU/C 38	G 3/8	77.5-3.05	38	26
VSRU/C 12	G 1/2	83-3.27	41	30
VSRU/C 34	G 3/4	104-4.09	55	38
VSRU/C 100	G 1"	118.5-4.66	65	46
VSRU/C 114	G 1" 1/4	135-5.31	80	55
VSRU/C 112	G 1" 1/2	149.5-5.88	90	62

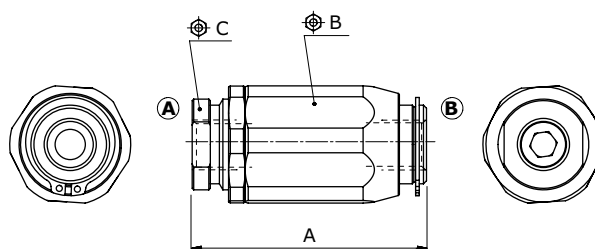

Ordering codes and description composition

Port size — Opening pressure
VSRU / C 14 Pa0,5




VSRU/C Complete valves

TYPE	CODE	DESCRIPTION
<u>Poppet type, opening pressure 0.5 bar (7.25 psi)</u>		
VSRU/C 14/Pa0,5	1603110100	Steel body, G1/4 ports
VSRU/C 38/Pa0,5	1603120100	Steel body, G3/8 ports
VSRU/C 12/Pa0,5	1603130100	Steel body, G1/2 ports
VSRU/C 34/Pa0,5	1603140100	Steel body, G3/4 ports
VSRU/C 100/Pa0,5	1603150100	Steel body, G1 ports
VSRU/C 114/Pa0,5	1603160100	Steel body, G 1" 1/4 ports
VSRU/C 112/Pa0,5	1603170100	Steel body, G 1" 1/2 ports


For different configurations or SAE thread please contact our Sales Dpt.

Rating diagrams


VSRU/C 14 pressure drop vs. flow
(A→B)

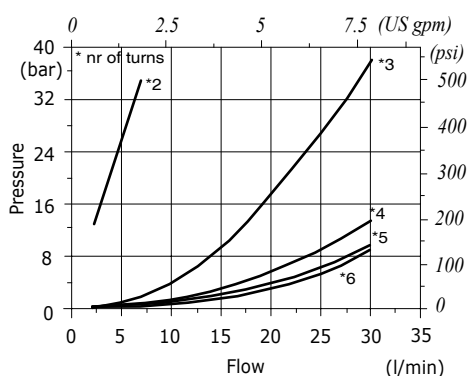


VSRU/C 38 pressure drop vs. flow
(A→B)

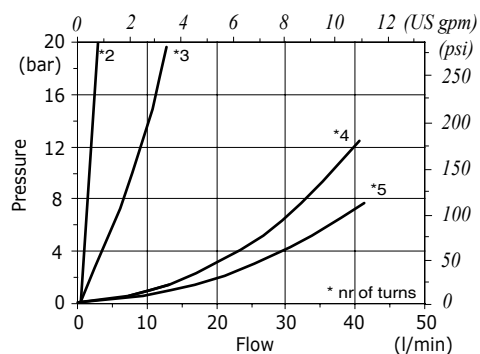


VSRU/C 12 pressure drop vs. flow
(A→B)

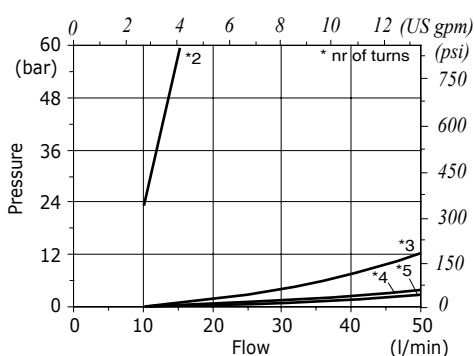


VSRU/C 34 pressure drop vs. flow
(A→B)

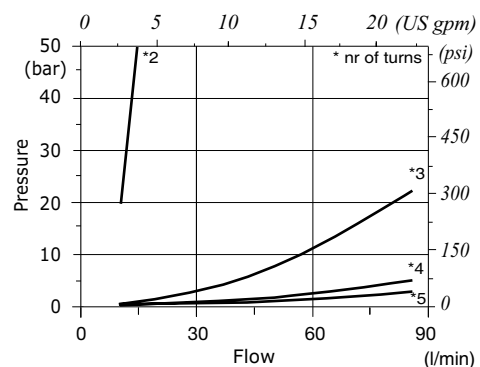


VSRU/C 100 pressure drop vs. flow
(A→B)

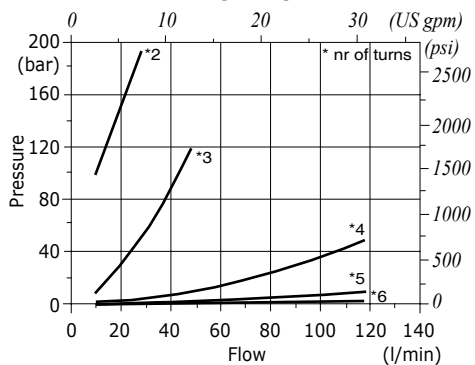

VSRU/C 114 pressure drop vs. flow
(A→B)

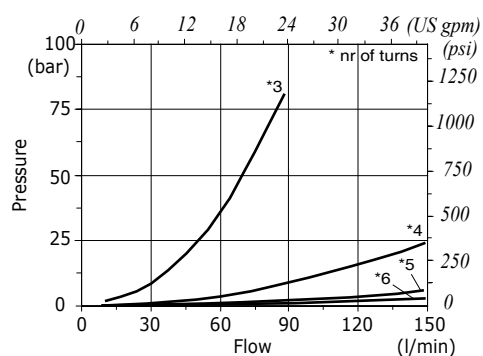


VSRU/C 112 pressure drop vs. flow
(A→B)

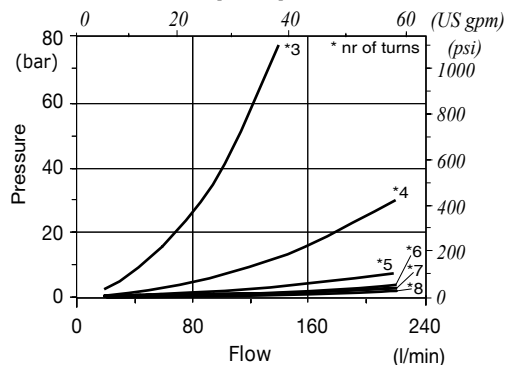


Rating diagrams


**VSRU/C 14 pressure drop vs. flow
(B→A)**

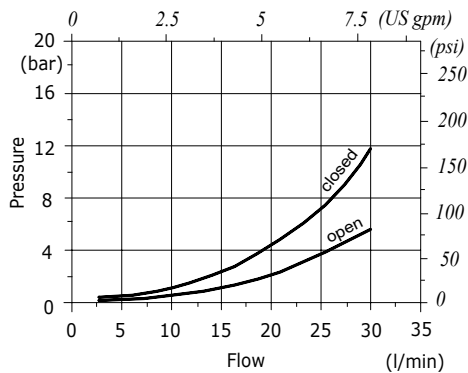


**VSRU/C 38 pressure drop vs. flow
(B→A)**

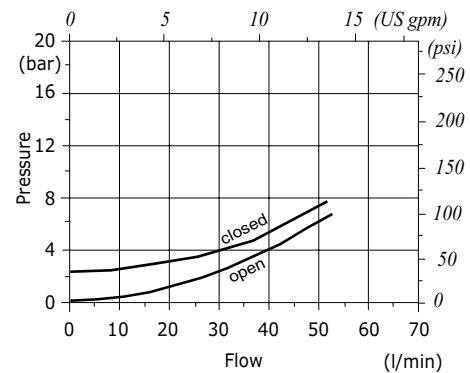


**VSRU/C 12 pressure drop vs. flow
(B→A)**

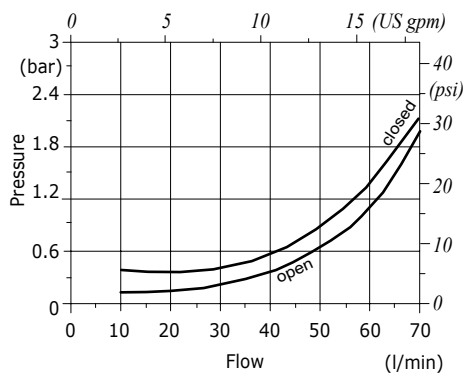


**VSRU/C 34 pressure drop vs. flow
(B→A)**

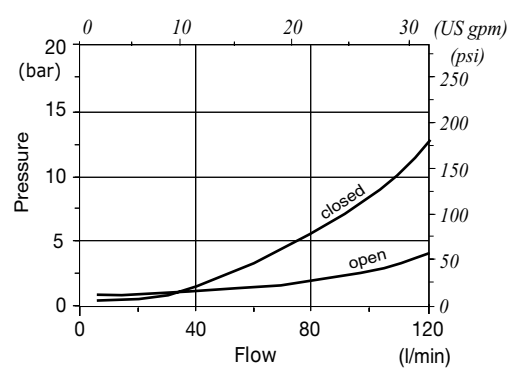

**VSRU/C 100 pressure drop vs. flow
(B→A)**

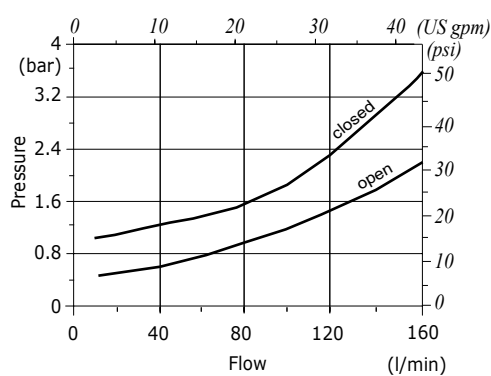

**VSRU/C 114 pressure drop vs. flow
(B→A)**

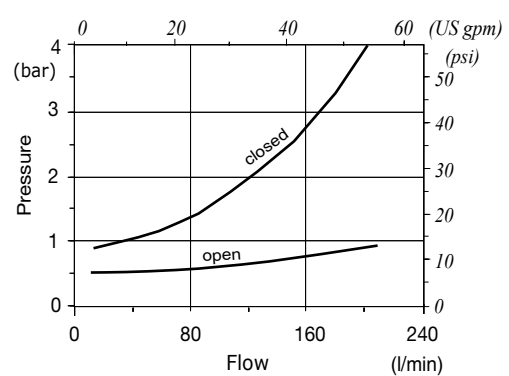

**VSRU/C 112 pressure drop vs. flow
(B→A)**

