

PROPORTIONAL COIL - TUBE ∅ 19 — 36 W

- Wire insulation class. . . . . .**H (>185°C)**
- ED. **100%**
- Coil power at 20° C. . . . . .**36 W**
- Max current at 24 V dc. . . . . **0,9 A**
- Max current at 12 V dc . . . . . **1,8 A**
- Ambient temperature . . . . . **-20 +40° C**
- Weight. . . . . .**0,28 Kg**


ELECTRIC CIRCUITS




STANDARD





WITH DIODE (BI-DIRECTIONAL)

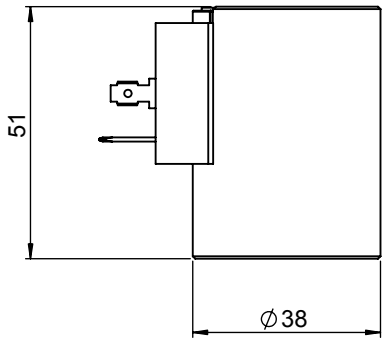

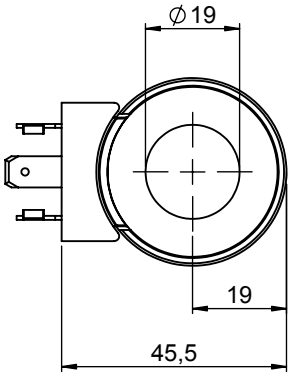



AMP - JUNIOR





DEUTSCH DT4





CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	3,9	STANDARD	**098001190**
DIN 43650	IP65*	H	24 V dc	14,5	STANDARD	**098002190**
DEUTSCH DT 4	IP67	F	12 V dc	3,9	WITH DIODE	**098101190**
DEUTSCH DT 4	IP67	F	24 V dc	14,5	WITH DIODE	**098102190**
AMP - JUNIOR	IP65*	F	12 V dc	3,9	WITH DIODE	**098201190**
AMP - JUNIOR	IP65*	F	24 V dc	14,5	WITH DIODE	**098202190**

*** Protection index with standard connector**