


PROPORTIONAL COIL - TUBE Ø 19


36 W

- Wire insulation class. H (>185°C)
- ED. 100%
- Coil power at 20° C. 36 W
- Max current at 24 V dc. 0,9 A
- Max current at 12 V dc. 1,8 A
- Ambient temperature-20 +40° C
- Weight. 0,28 Kg



ELECTRIC CIRCUITS





STANDARD





**WITH DIODE
(BI-DIRECTIONAL)**

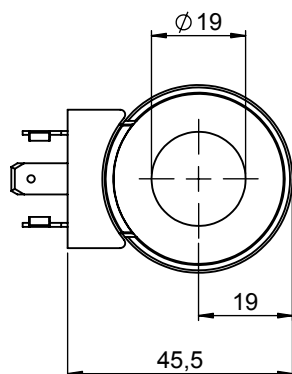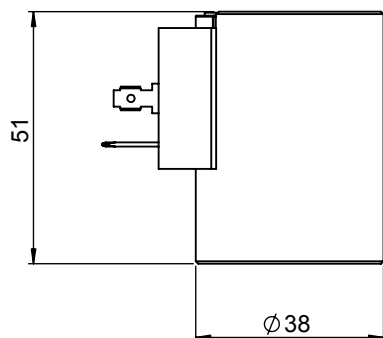

AMP - JUNIOR



DEUTSCH DT4



CONNECTOR	PROTECTION CLASS	COIL THERMAL INSULATION CLASS	VOLTAGE [V]	RESISTANCE [Ω]	CIRCUIT	ORDERING CODE
DIN 43650	IP65*	H	12 V dc	3,9	STANDARD	098001190
DIN 43650	IP65*	H	24 V dc	14,5	STANDARD	098002190
DEUTSCH DT 4	IP67	F	12 V dc	3,9	WITH DIODE	098101190
DEUTSCH DT 4	IP67	F	24 V dc	14,5	WITH DIODE	098102190
AMP - JUNIOR	IP65*	F	12 V dc	3,9	WITH DIODE	098201190
AMP - JUNIOR	IP65*	F	24 V dc	14,5	WITH DIODE	098202190

* Protection index with standard connector